



NVR 8900 SERIES

4K ULTRA HD

Network Video Recorder



Xmeye



hiviewXview



Download Application

NETWORK VIDEO RECORDER

H.265+ NVR 32 CH

2.0 MegaPixel



Feature

- GUI Languages Thai, English Etc. (More than 20)
- Support Startup wizard.
- Support Quick set IP camera, search/add IPC via NVR menu.
- Support Hiview cloud P2P (www.hiviewxview.com)
- Support App "hiviewxview"
- Support OTA upgrade (Online upgrade)
- Support Hiview DDNS
- Support Tour function
- Support HDMI output resolution 4K
- Support Record bitrate information table
- Support Log search and export file
- Support HDD information
- Support Import/Export Log, File config function
- Support Auto-reboot maintain system
- Support Output image adjustment
- Support Account management
- Support PTZ control

Specification

1/2

Model	HP-8925H2
Decode	H.265+/H.264+
Video Input	4Kx8Ch/5MPx25Ch/1080Px32Ch
Playback	4Kx1Ch/5MPx2Ch/1080Px4Ch
Video Standard	PAL/NTSC
AUDIO	
Audio Compression	G.711a
Audio Intercom	Support
RECORD	
Record Mode	Manual, Regular, Alarm, Motion, Timing
Record Period	Support 4 period mode
Search Mode	Common playback mode Intelligent fast playback mode Intelligent retrieval mode Calendar search mode Backup device mode
Storage Mode	HDD storage, Network storage
Backup Mode	Network, USB, SATA
Overwrite Mode	Support
Snapshot Mode	Support cycle capture, timing capture
CHANNEL TYPE	
Mode 1	5MP x25, Playback x2, Preview x25
Mode 2	1080P x32, Playback x2, Preview x25
Mode 3	4K x8, Playback x1, Preview x8
NETWORK	
Network Protocol	IPv4, IPv6, DHCP, DNS, DDNS, UPNP PPPoE, FTP, SMTP, NTP, RTSP,
ONVIF	Support V2.4
3G/4G	Support
Wi-Fi	Support USB Wi-Fi
Cloud P2P	Support (www.hiviewxview.com)
Mobile Application	iOS&Android (hiviewxview)
OTA Upgrade	Support



Xmeye


hiviewXview

Download Application

NETWORK VIDEO RECORDER

H.265+ NVR 32 CH

2.0 MegaPixel

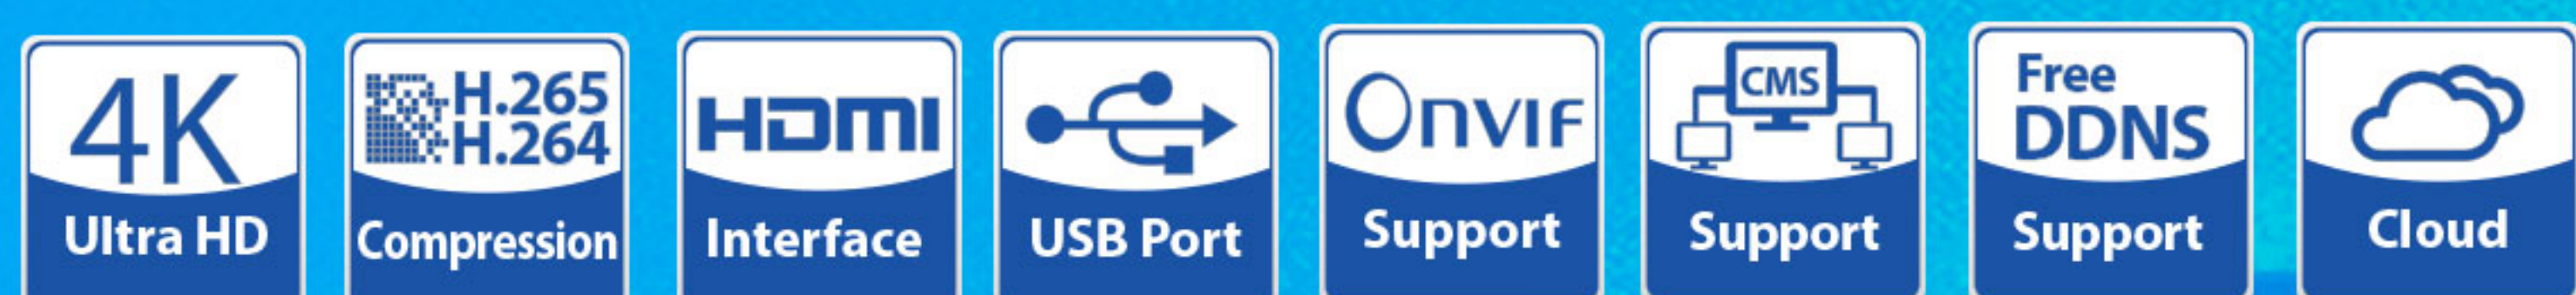

Feature

- GUI Languages Thai, English Etc. (More than 20)
- Support Startup wizard.
- Support Quick set IP camera, search/add IPC via NVR menu.
- Support Hiview cloud P2P (www.hiviewxview.com)
- Support App "hiviewxview"
- Support OTA upgrade (Online upgrade)
- Support Hiview DDNS
- Support Tour function
- Support HDMI output resolution 4K
- Support Record bitrate information table
- Support Log search and export file
- Support HDD information
- Support Import/Export Log, File config function
- Support Auto-reboot maintain system
- Support Output image adjustment
- Support Account management
- Support PTZ control

Specification

2/2

Model	HP-8925H2
Browsers Access	Support IE, Chrome, Firefox, Etc.
VMS	Support
ALARM	
Alarm Mode	Motion detection, video blind, video loss Abnormal, Intelligent alarm
Alarm Triggering	Record, tour, show message, buzzer, send email, Write log, mobile reported PTZ activation, Post record
Alarm Period	Support
FTP Alarm	Support
IP Filter	Support (White list and black list)
Buzzer Alarm	Support
Hardware Interface	
HDMI Output	x1 (1024x768, 1280x1024, 1440x900, 1920x1080, 3840x2160)
VGA Output	x1 (1024x768, 1280x1024, 1440x900, 1920x1080)
Audio Input	x1 (RCA)
Audio Output	x1 (RCA)
Ethernet Port	x1 RJ45 (Speed 1.0 Gbps)
USB 2.0	x2
HDD	x2 (max.20TB.)
Cooling Fan	x1 (build-in)
General	
Working Temperature	0°C~+55°
Working Humidity	10%~90% RH
Power Supply	12V/4A
Power Consumption	<10W (Without HDD)
Weight	around 1.7KG
Dimension (mm.)	310(L)x298(W)x60(H)



Xmeye

hiviewXview

Download Application

NETWORK VIDEO RECORDER